



DISPENSERS



FUEL KITS



PUMPS



METERS



NOZZLE



FILTRATION

FILTROLL

FEATURES

- **DOUBLE-STAGE FILTRATION**
- **SPIRAL TUBE**
- **EASY TO HANDLE**
- **LARGE-DIAMETER WHEELS**

The PIUSI FILTROLL is an innovative portable unit that provides a complete double filtering capacity of any kind of tank while absorbing water and impurities. The built-in sturdy trolley allows the operator to easily handle this device in any condition. It is equipped with suction pipe and integrated bottom valve.

PERFORMANCE

UP TO

15 GPM

FLOW RATE

12V DC

VOLTAGE

POWER

30μ

WATER ABSORPTION

FILTRING

5μ

IMPURITIES

FILTRING



FILTROLL

PACKAGING

PART #	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
FO0506140	40	88.2	790X590X590	31.1X23.2X23.2	1



FLUID
MONITORING

PIUSI
®



AIR



ANTIFREEZE



DEF



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

CHART

FILTROLL

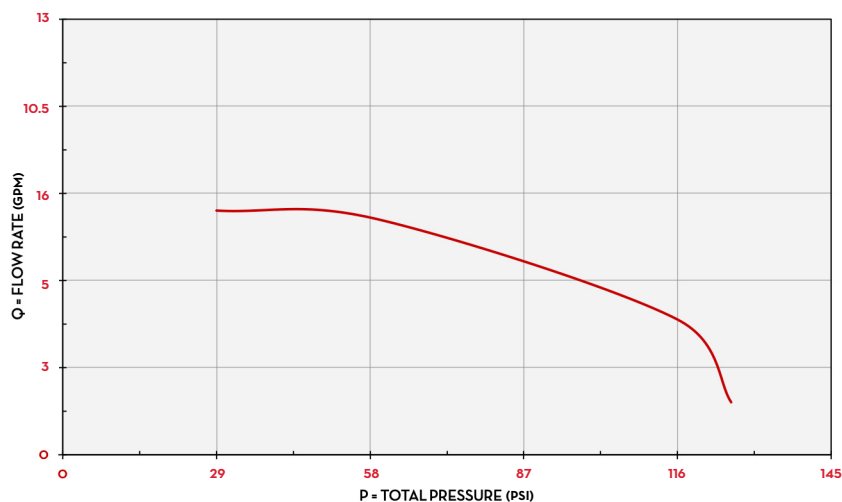

TYPE OF FLUID SAE 80W90

TEMPERATURE 63 °F

IN THE BOX

- FILTROLL UNIT
- SUCTION HOSE
- DELIVERY HOSE
- NOZZLE
- INSTRUCTION MANUAL

DETAILS




TWO-STEP FILTRATION




WATER/IMPURITIES FILTERS

DIMENSIONS


FILTROLL FRONT

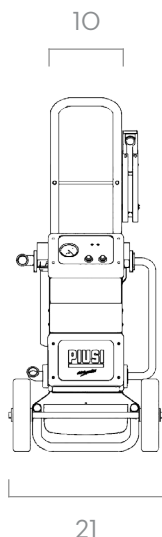

FILTROLL BACK

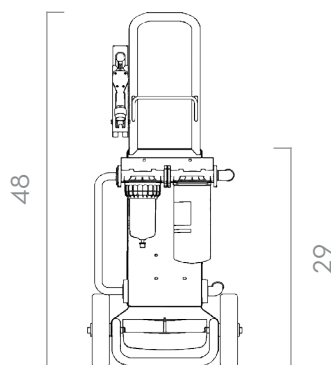

FILTROLL SIDE

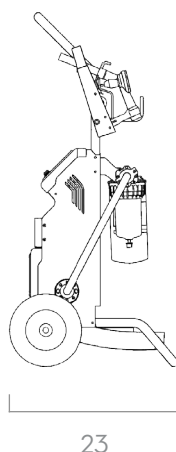

Dimensions expressed in inches

MATERIALS

- BODY: CAST IRON
- ROTOR: SINTERED STEEL
- VANES: TECHNOPOLYMER
- SHAFT: STEEL
- FILTER: ABSORBENT FILTERING PAPER

TECHNICAL DATA

PART #	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			PUMP	HOSE LENGTH	
			L/MIN	GPM	AC V./HZ DC VOLT	POWER WATT	AMP. MAX.		DELIVERY M/FT.	SUCTION M/FT.
FO0506140	FILTROLL 12V 15GPM DIESEL NPT	D	56	15	12	300	35	PANTH. DC	4 / 13	4 / 13

AVAILABLE IN VERSION 230V/60HZ, 120V/60HZ

FILTROLL

FILTERING SYSTEM

93