



DISPENSERS



FUEL KITS




PUMPS



METERS



NOZZLE



FILTRATION

K600/3

FEATURES

- ADJUSTABLE FLANGES
- SUITABLE FOR INDUSTRIAL APPLICATIONS
- IDEAL FOR MOBILE INSTALLATIONS
- LOW ENERGY CONSUMPTIONS

The PIUSI K600/3 is an oval gear meter suitable for monitoring the delivery of diesel. The meter is equipped with an integrated filter and is also available in pulser version.

PERFORMANCE

UP TO
26.4 GPM

FLOW RATE

0.2%

REPEATIBILITY

± 0.5%

ACCURACY



K600/3 METER



K600/3 PULSER

PACKAGING

PART #	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
METERS					
FOO496A40	1.6	3.5	200X120X140	7.9X4.7X5.5	1
PULSER					
FOO472A30	2.6	5.7	200X120X140	7.9X4.7X5.5	1



FLUID MONITORING



AIR



ANTIFREEZE



DEF



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

CHART

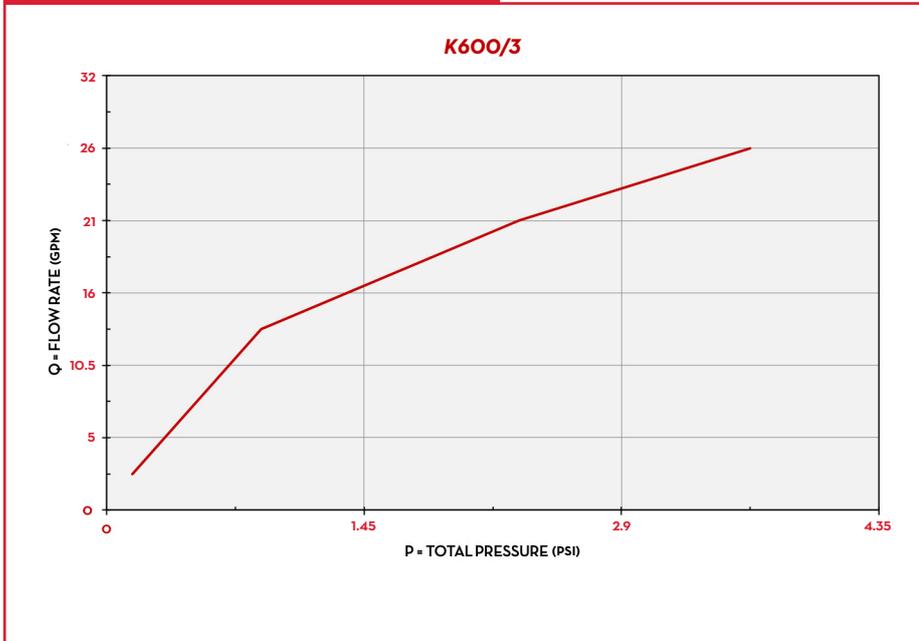

IN THE BOX

- K600/3 METER
- FLANGES
- INSTRUCTION MANUAL

DETAILS




5-DIGIT DISPLAY



OVAL GEARS

DIMENSIONS

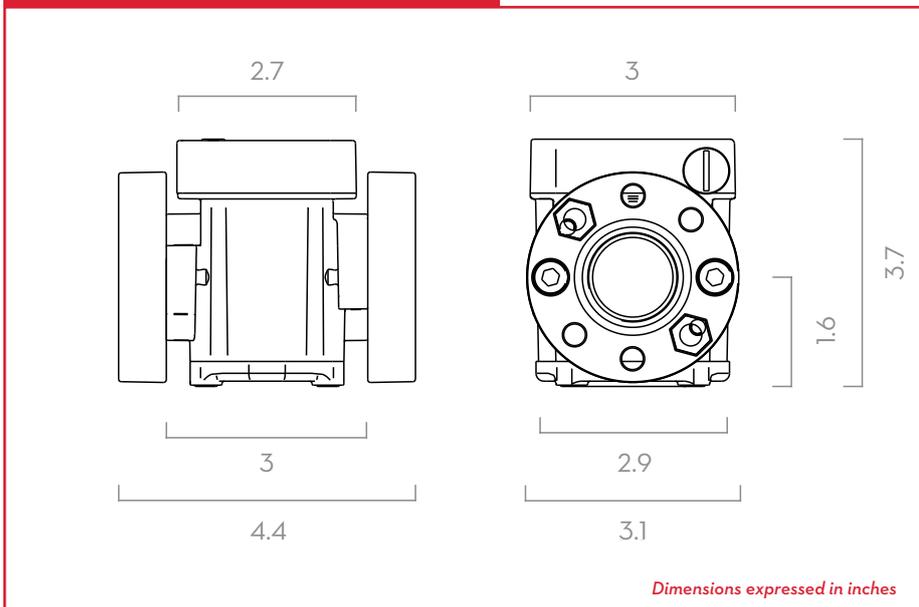

MATERIALS

- BODY: ALUMINUM
- GEARS: TECHNOPOLYMER

TECHNICAL DATA

PART #	DESCRIPTION	FLUIDS TYPE	FLOW RATE		PRESSURE		BATTERY N ^o 2 X 1.5V (INCLUDED)	FLANGE	INLET / OUTLET	INLET FILTER
			L/MIN	GPM	BAR	PSI				
METERS										
FOO496A40	K600/3 DIESEL METER 2.5-26.5GPM 1" NPT	A D O	10 - 100	2.64 - 26.4	30	426	YES	YES	1" NPT	YES
PULSER										
FOO472A30	K600/3 DIESEL PULSER 1" NPT	A D O	10 - 100	2.64 - 26.4	30	426	NO	YES	1" NPT	YES

UPON REQUEST AVAILABLE IN BSP VERSION AND DISPLAY IN LITER

K600/3